Life
is what you
make it.

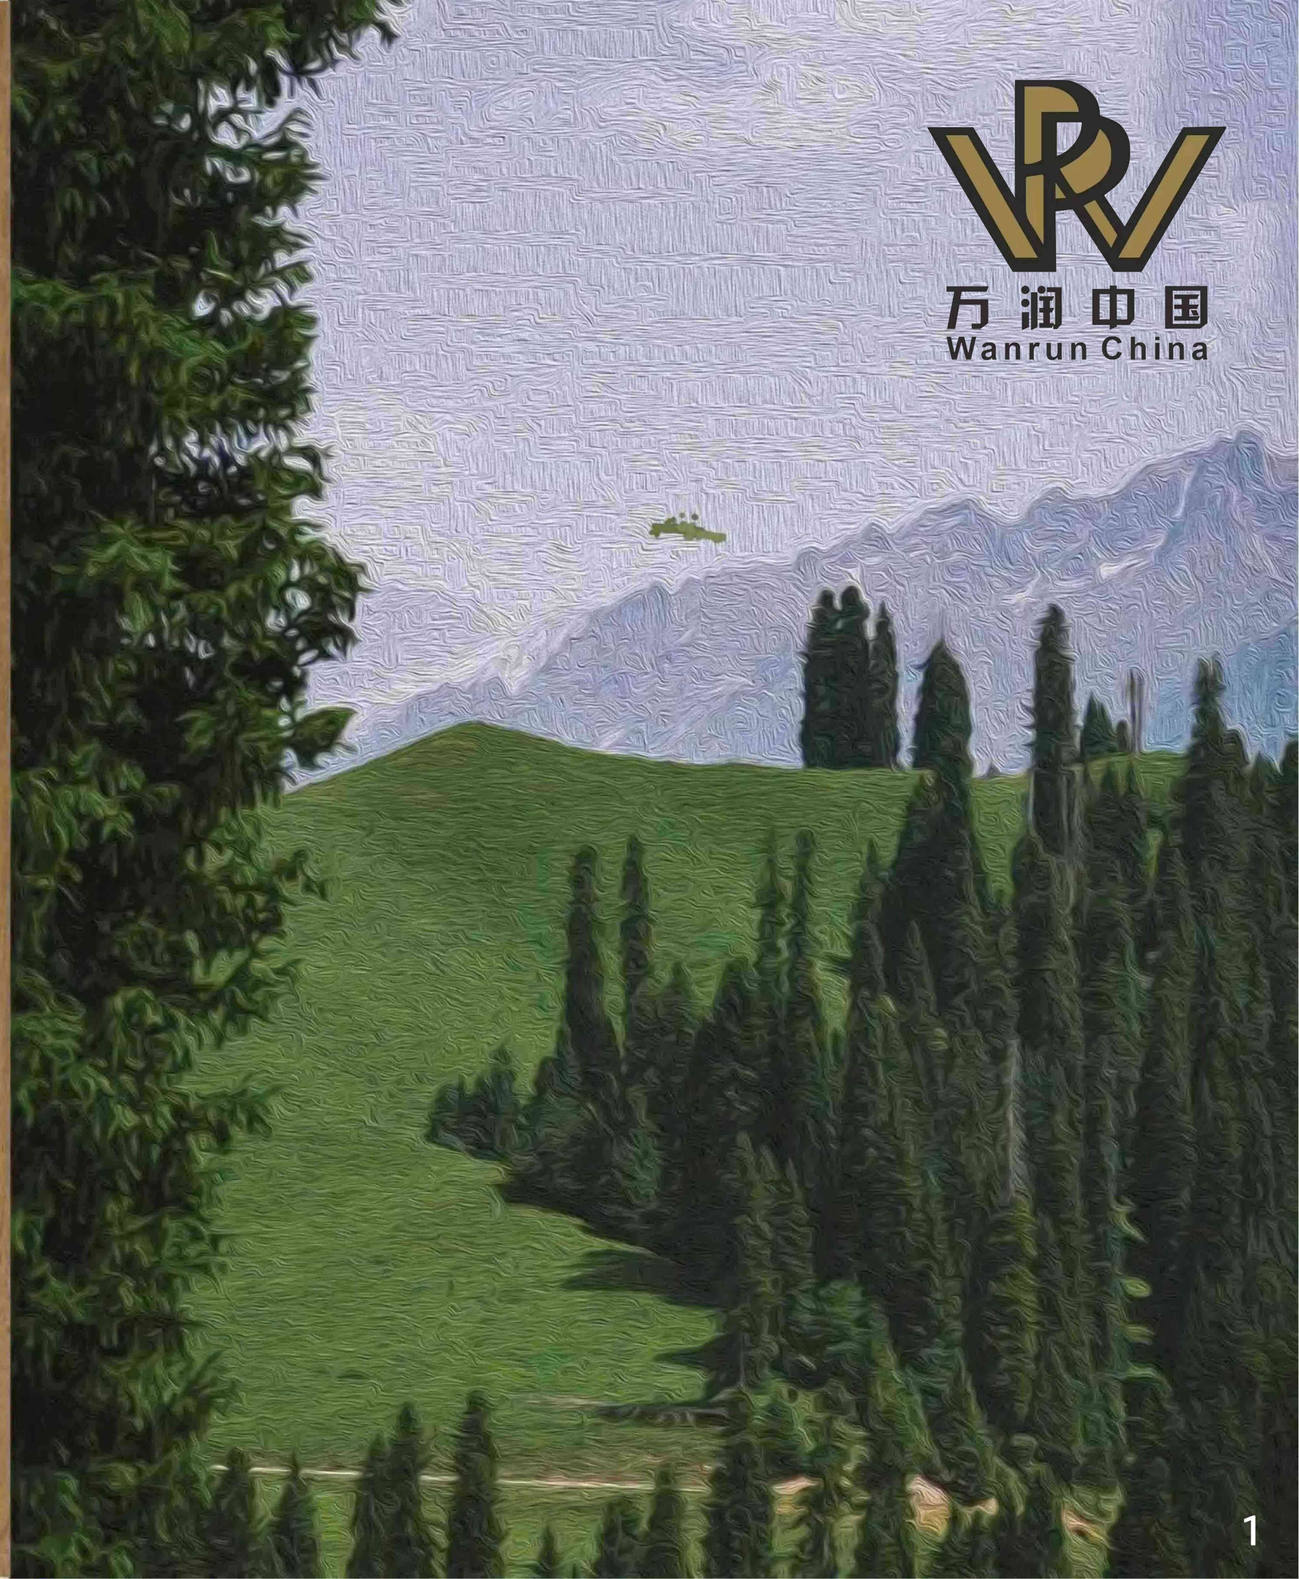

WANRUN FLOORING

Let low carbon and environmental protection lifestyle into thousands of households.

Catalog

- **Wanrun Manufacturer**
- **Wanrun Flooring**
  - SPC
  - RSVP(SPC ABA)
  - LVT Flooring

Laboratory quality testing

Laboratory quality testing

Scratch resistance tester

Scratch resistance tester details

analytical balance

Universal tension machine

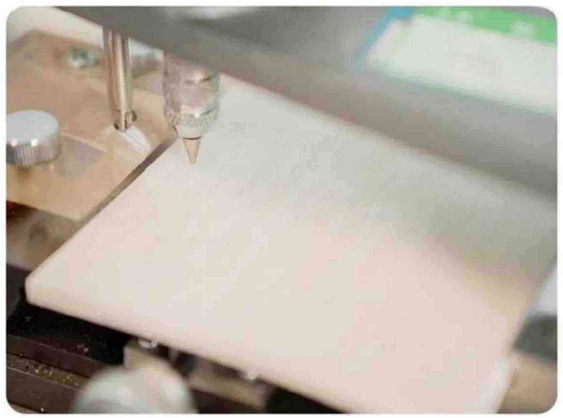

Scratch resistance tester

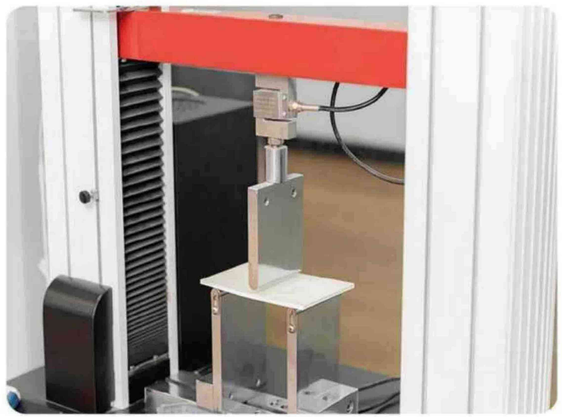

Static bending strength and elastic modulus

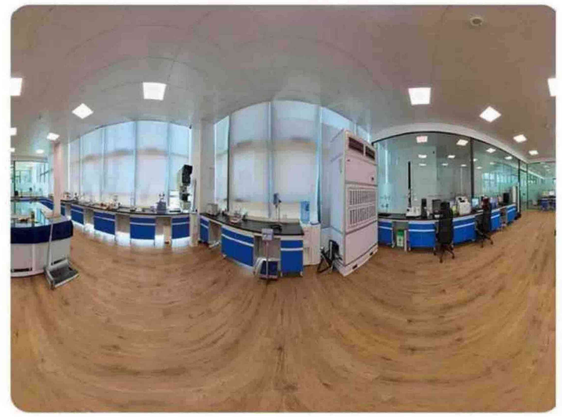

360°photo of laboratory

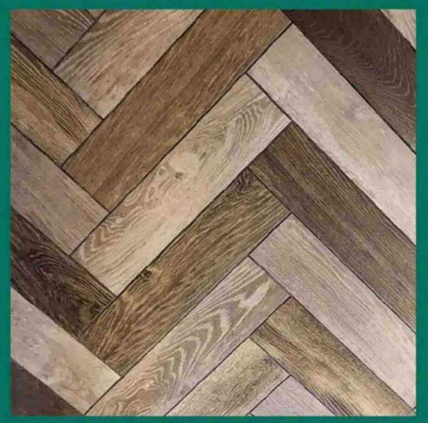

SPC FLOORING

Insect and Termite Control **100% Virgin Material ECO-friendly** **High Fire and Water Resistance** **Formaldehyde Free**

UNICLIC®
PATENTED TECHNOLOGY

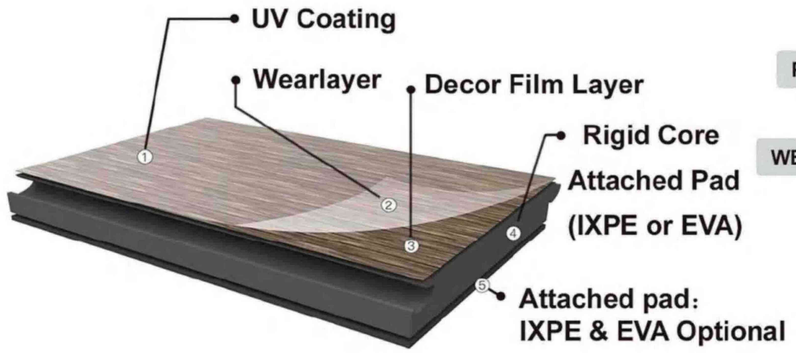

- SPC CLICK
- NO GAP
- POPULAR AND GENERAL
- THICKNESS :3.2-7.0MM
- WEAR LAYER: 0.3/0.5/0.7MM

SPC Package Specification

Item size		Specification		Packing	
mm	in	Thickness	Wear Layer	Pcs/CTN	Sqm/CTN
1220 x 180	48 x 7.086	4mm	0.3mm	12	2.6352

CTN Size		One Container Loading		
mm	in	CTNS/ Pallets	Sqm/ Container	Sqm/ Container
1225 x 185 x 49	36.2 x 6.3 x 1.93	55	3030	20

Avaliable size

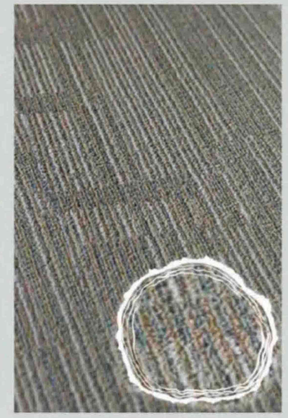

SPC Plank: 150 x 1220mm, 180 x 1220mm
220 x 1220mm, 305 x 1220mm
Thickness: 3.5mm~7.0mm
Wear layer: 0.3mm,0.5mm,0.7mm

SPC Tile: 305 x 610mm, 457 x 610mm
Thickness: 3.5mm~7.0mm
Wear layer: 0.3mm,0.5mm,0.7mm

Advantages:
Sound absorption and noise reduction
Super stability & Extreme durability
Superior Kids & Pets resistant
Fast installation with Unilin patented technology

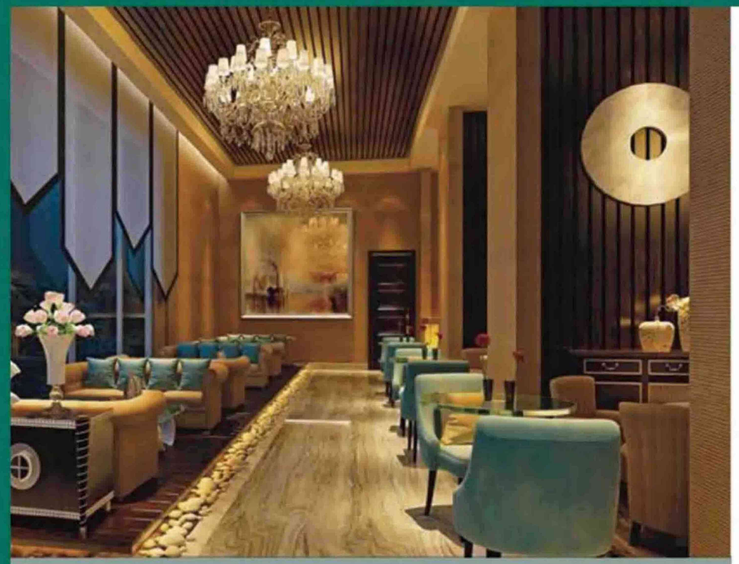

SPC Installation



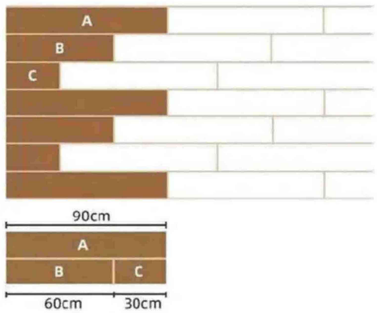

Method 1: 369 Split Joint Method

Using the three-point reciprocal installation method, this method expands the entire space of the rate of writing, but also we have been pursuing the concept of letting art decorate the home and let the aesthetics into life.

Method 2: Ⅰ-joining method

Using the Ⅰ-joining installation method to find peace in the smoothness, simple sorting but can bring a harmonious visual feeling to your space.

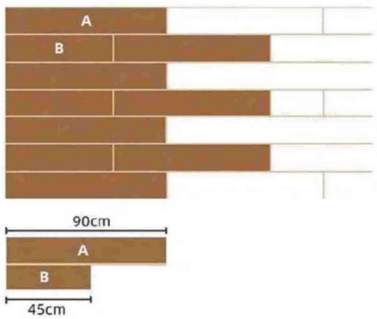

New locking design, eliminating the cost and trouble of gluing and playing keel, cement floor, tile, self-leveling, floor heating can be paved

Wanrun SPC Flooring Specification

Connect	Unilin Patented Technology
Standard Sizes	Plank: 150mm x 1220mm 180mm x 1220mm 220mm x 1220mm 305mm x 1220mm Tile: 305mm x 610mm 457mm x 610mm
Standard Thickness	3.2mm -7mm
Wear Layer	0.3mm 0.5mm 0.7mm
Padded IXPE/EVA	1.0mm 1.5mm 2.0mm
Density	1.95~1.97g/cm3
Warranty	15 years warranty for private residential building 10 years warranty for commercial building

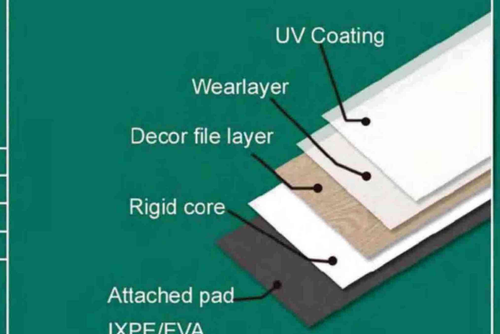

Characteristics	Test	SPC
Curling	ISO23999-2008	≤1.0mm
Dimensional Stability	ISO23999-2008	""X Direction: 0.08% Y Direction: 0.07%""
Residual Indentation	ISO24343-1:2007	~0.01mm
Light Stability	ISO105-B02:Method 3	≥6
Castor Chair	EN425	Typ W
Classification	EN ISO 10582	23, 31/33, 42
Reaction to fire	EN13501-1	Bfl S1(B1)
Slip Resistance	DIN 51130 EN 13893	R10 DS
Dimensions	ISO24341	" 180 x 1220 mm (for plank) 610 x 305 mm （for tile）"
Wear Resistance	EN660-2	Group T
Chemical Resistance	EN438	Grade 5
Squareness	ISO24342:2007	""Deviation range: X Direction: 0.00mm~+0.05mm Y Direction:0.00mm~+0.05mm""
Straightness	ISO24342:2007	""Deviation range: X Direction: 0.00mm~+0.03mm Y Direction:0.00mm~+0.05mm""
Peel Resistance	ISO24345:2006	""X Direction: 75N/50mm Y Direction: 75N/50mm""
Burning cigarette test	EN1399:1997 Method B	"Rating 3: Moderate change of gloss and moderate brown stain"
Utilization		Recyclable

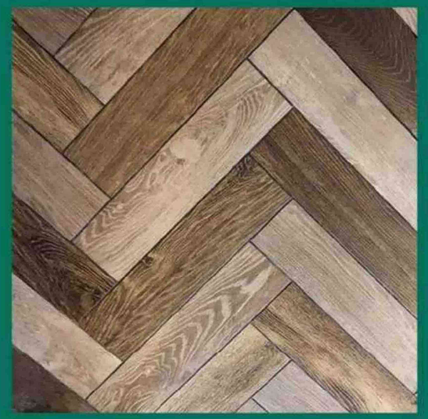

SPC ABA (RSVP)

Antimildew and Antibacterial **Better Stability** **Sound absorption** **New Generation of Vinyl Flooring**

UNICLIC®
PATENTED TECHNOLOGY

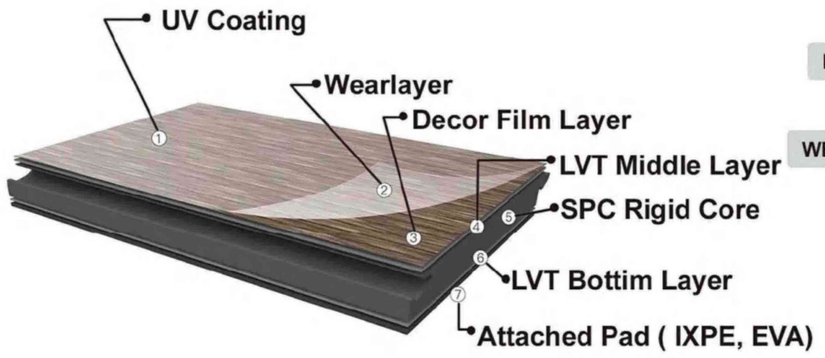

SPC ABA(RSVP)

NO GAP

POPULAR AND GENERAL

THICKNESS :4.2-7.0MM

WEAR LAYER: 0.3/0.5/0.7MM

SPC ABA (RSVP) Package Specification

Item size		Specification		Packing	
mm	in	Thickness	Wear Layer	Pcs/CTN	Sqm/CTN
1220 x 180	48 x 7.086	5mm	0.3mm	12	2.6352

CTN Size		One Container Loading		
mm	in	CTNS/Pallets	Sqm/Container	Sqm/Container
1225x185x49	36.2x6.3x1.93	50	2529	20

Avaliable size

RSVP Plank: 150 x 1220mm, 180 x 1220mm
220 x 1220mm, 305 x 1220mm
Thickness: 4.2mm~7.0mm
Wear layer: 0.3mm,0.5mm,0.7mm

RSVP Tile: 305mm x 610mm, 457mm x 610mm
Thickness: 4.0mm~5.0mm
Wear layer: 0.3mm,0.5mm,0.7mm

Advantages:
100% Waterproof & Fireproof
Protect Scratch and Easy Maintenance
Anti-Slip Resistance
More Easy Clean
No Any Gap

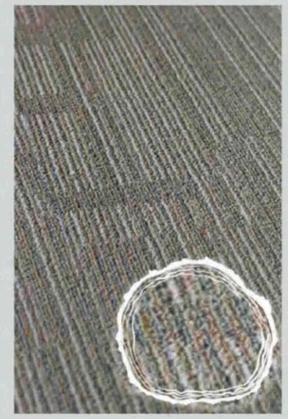

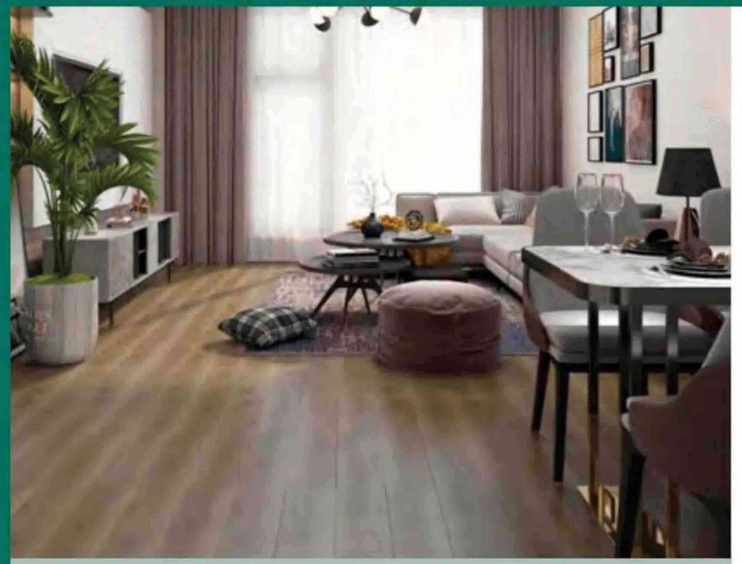

SPC ABA (RSVP) Installation



Method 1: 369 Split Joint Method

Using the three-point reciprocal installation method, this method expands the entire space of the rate of writing, but also we have been pursuing the concept of letting art decorate the home and let the aesthetics into life.

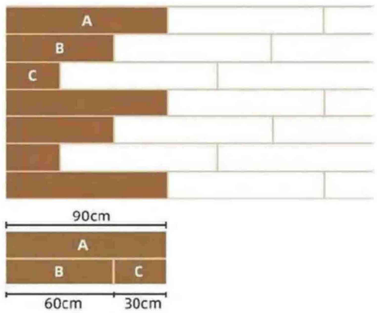

Method 2: Ⅰ-joining method

Using the Ⅰ-joining installation method to find peace in the smoothness, simple sorting but can bring a harmonious visual feeling to your space.

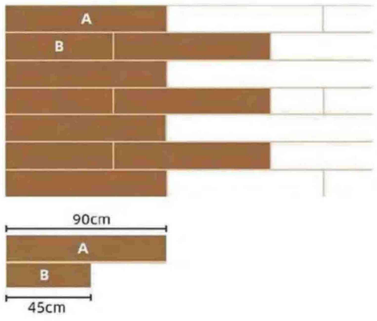

New locking design, eliminating the cost and trouble of gluing and playing keel, cement floor, tile, self-leveling, floor heating can be paved

Wanrun SPC ABA (RSVP) Flooring Specification

Connect	Unilin Patented Technology
Standard Sizes	Plank: 150mm x 1220mm 180mm x 1220mm 220 x 1220mm 305mm x 1220mm Tile: 305mm x 610mm 457mm x 610mm
Standard Thickness	4.2mm -7mm
Wear Layer	0.3mm 0.5mm 0.7mm
Padded IXPE/EVA	1.0mm 1.5mm 2.0mm
Density	1.88~1.94g/cm3
Warranty	15 years warranty for private residential building 10 years warranty for commercial building

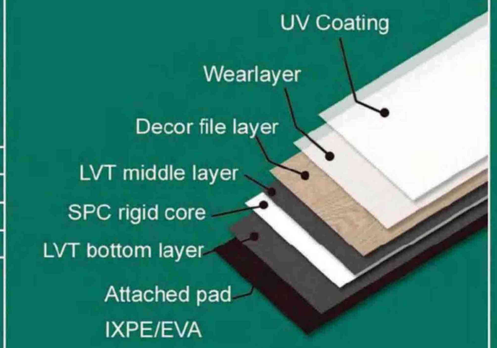

Characteristics	Test	SPC ABA (RSVP)
Curling	ISO23999-2008	≤0.5mm
Dimensional Stability	ISO23999-2008	""X Direction: 0.08% Y Direction: 0.02%""
Residual Indentation	ISO24343-1:2007	~0.04mm
Light Stability	ISO105-B02:Method 3	≥6
Castor Chair	EN425	Typ W
Classification	EN ISO 10582	23, 31/33, 42/34, 43
Reaction to fire	EN13501-1	Bfl S1(B1)
Slip Resistance	DIN 51130 EN 13893	R10 DS
Dimensions	ISO24341	" 180 x 1220 mm (for plank) 305 x 610 mm （for tile） "
Wear Resistance	EN660-2	Group T
Chemical Resistance	EN438	Grade 5
Impact Resistance	EN1534	7.4 Kgf/mm³
Squareness	ISO24342:2007	""Deviation range: X Direction: 0.00mm~+0.05mm Y Direction:0.00mm~+0.05mm""
Straightness	ISO24342:2007	""Deviation range: X Direction: 0.00mm~+0.03mm Y Direction:0.00mm~+0.05mm""
Peel Resistance	ISO24345:2006	""X Direction: 75N/50mm Y Direction: 75N/50mm""
Burning cigarette test	EN1399:1997 Method B	"Rating 3: Moderate change of gloss and moderate brown stain"
Utilization		Recyclable
Locking Strength	ISO24334	≥1200N/50m

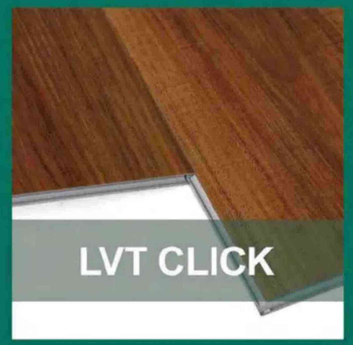

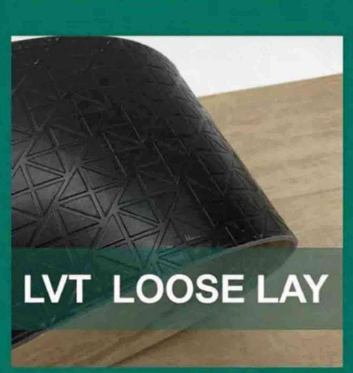

LVT FLOORING

WATERPROOF FIREPROOF PROTECT SCRATCH EASY MAINTENANCE

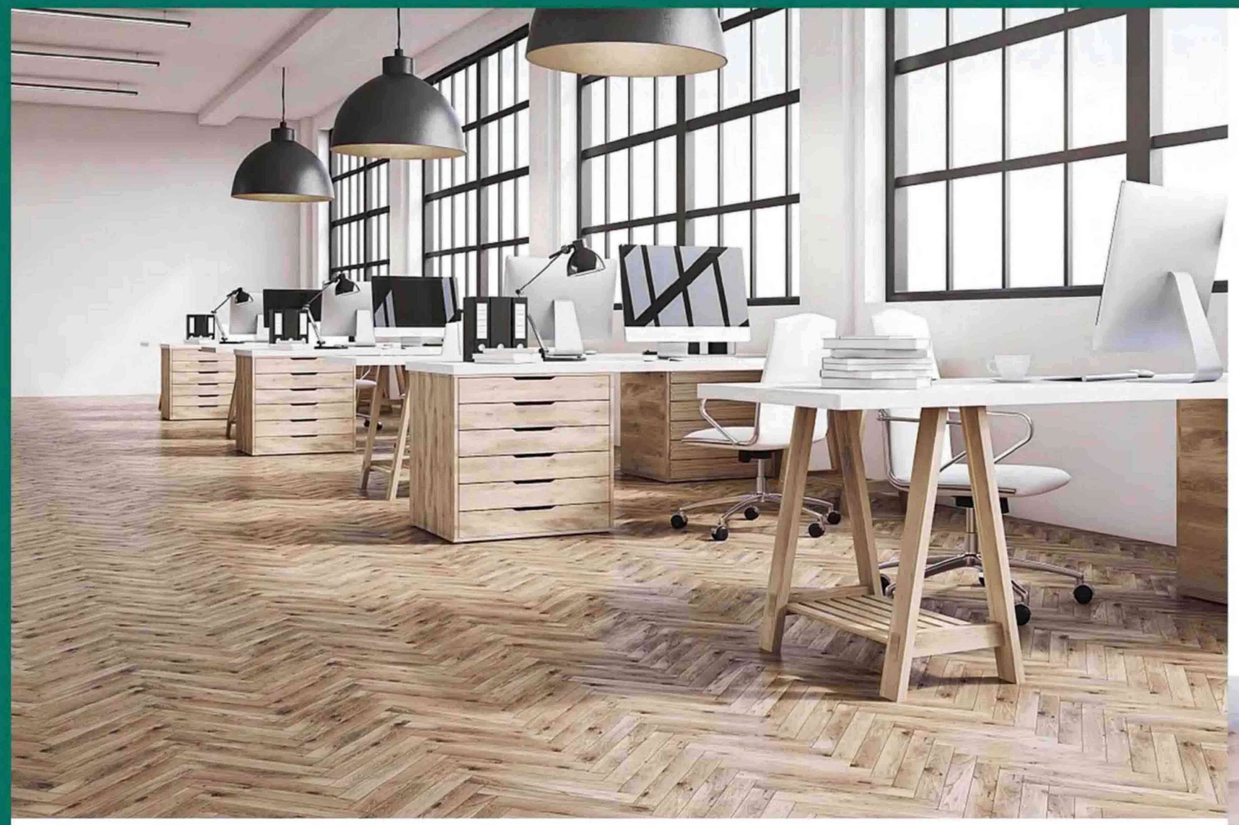

Dry Back means the back of floor is dry and plain Meanwhile there is no click systemon the edge Customers need to brush glue on the back for installation.

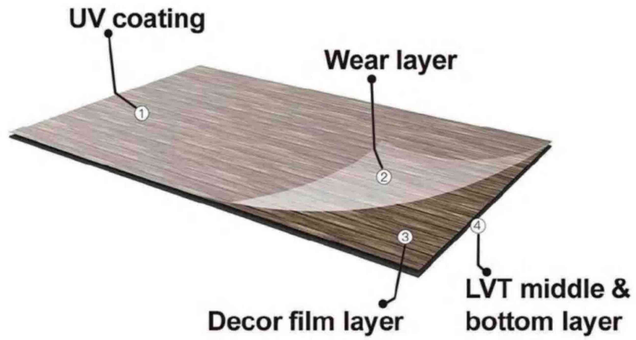

LVT DRY BACK

NEED GLUE

COST-EFFECTIVE

THICKNESS:2.0-5.5MM

WEAR LAYER: 0.3/0.5/0.7MM

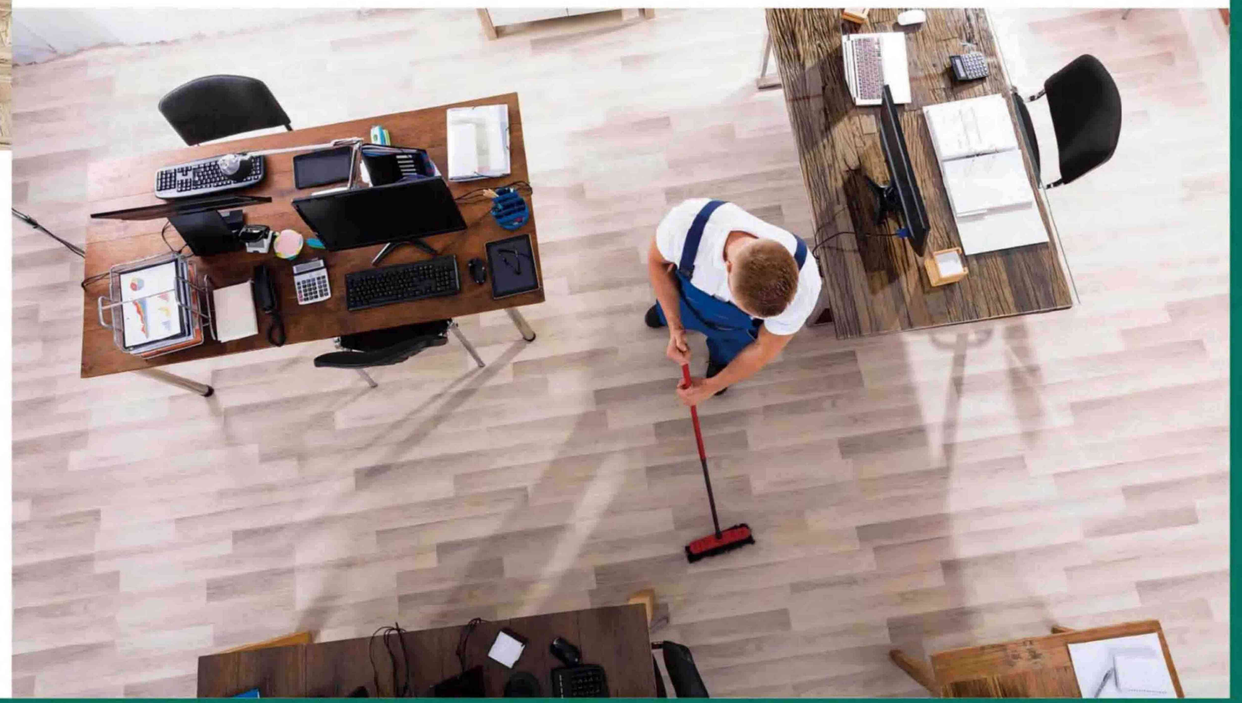

LVT Click flooring owns click and lock edge , Which connects floor piece by piece , No glue for installation.

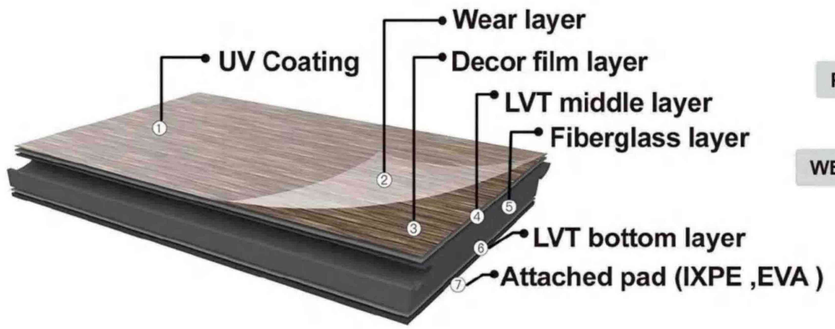

LVT CLICK

NO GAP

POPULAR AND GENERAL

THICKNESS :4.0-6.0MM

WEAR LAYER: 0.3/0.5/0.7MM

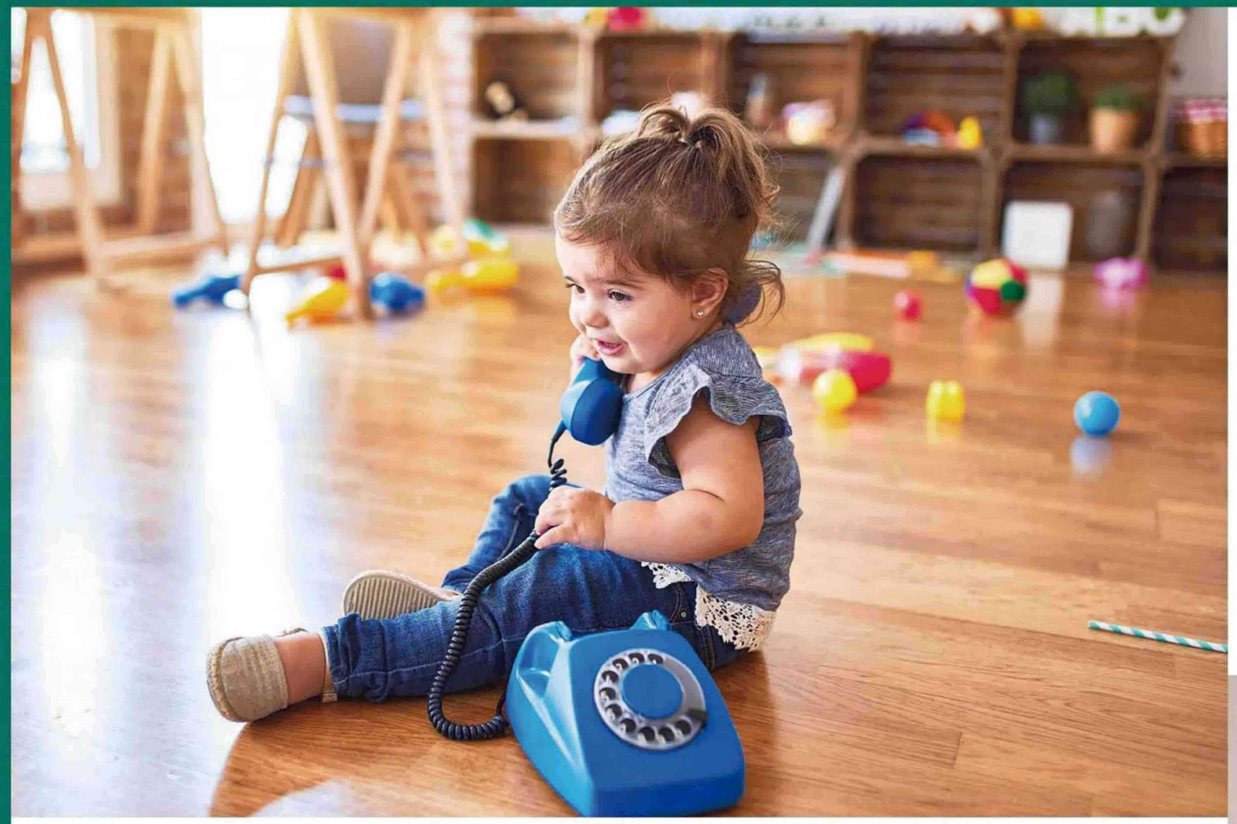

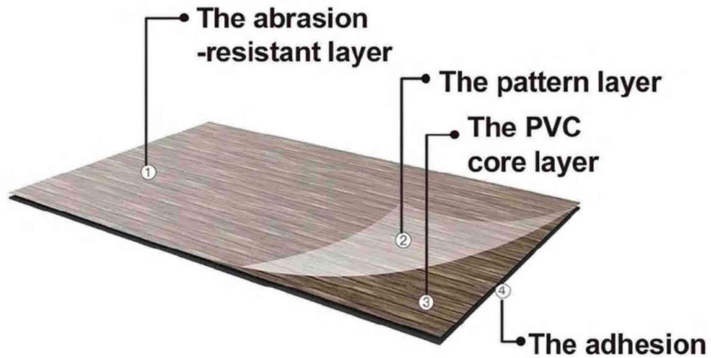

LVT SELF ADHESIVE

DIY

EASY INSTALLATION

THICKNESS : 1.2 - 3.0mm

WEAR LAYER : 0.1 - 0.5mm

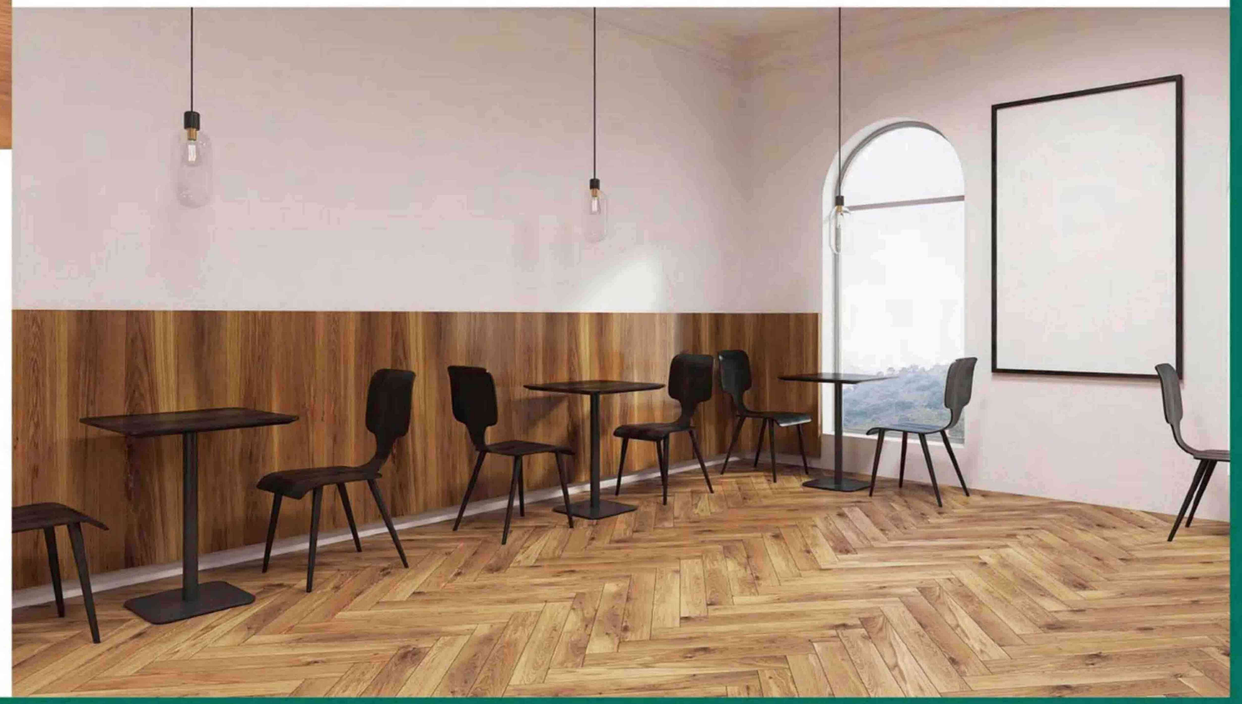

Loose lay has special construction on back ,Which helps the floor to stick to the ground,
No glue or Click system is needed for installation.

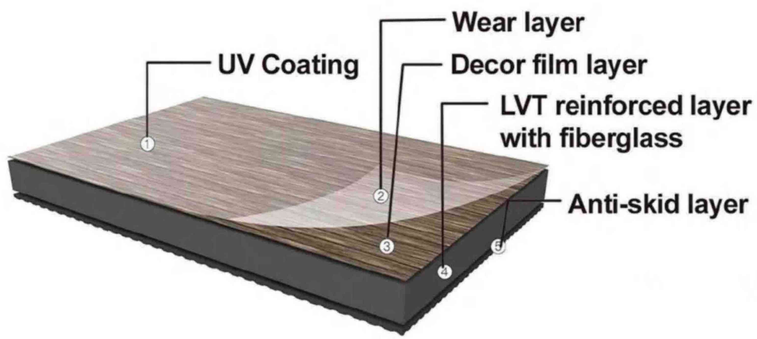

LVT LOOSE LAY

COMFORTABLE

EASY TO REPLACE

THICKNESS :4.0-6.0MM

WEAR LAYER: 0.3/0.5/0.7MM

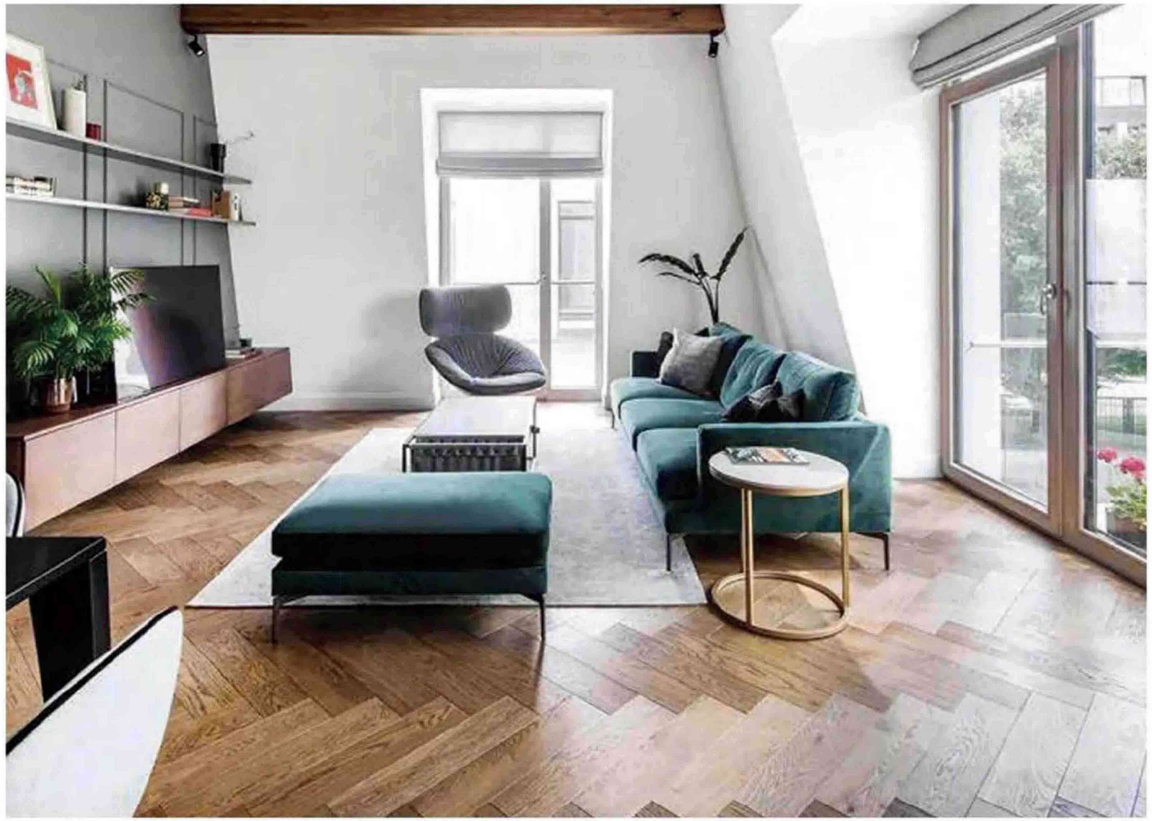







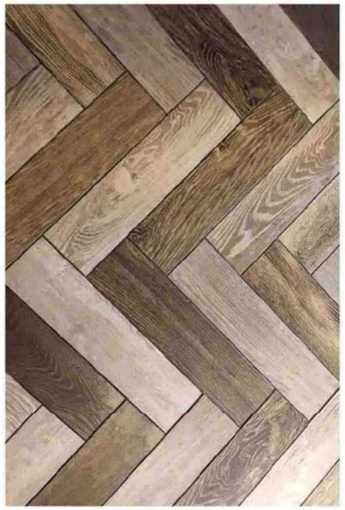

LVT Glue Down

Connect	Size
Standard Sizes	Plank: 159mm x 1229mm 152.4mm x 914.4mm 184.15mm x 1219.2mm 228.6mm x 1219.2mm 228.6mm x 1524mm Tile: 457.2mm x 457.2mm 457.2mm x 609.6mm 914.4mm x 914.4mm 304.8mm x 609.6mm
Standard Thickness	2.0mm -5.5mm
Wear Layer	0.3mm 0.5mm 0.7mm（+13%/ -10% ）
Dimensional Stability	ISO23999:2008
Warranty	15 years warranty for private residential building 10 years warranty for commercial building

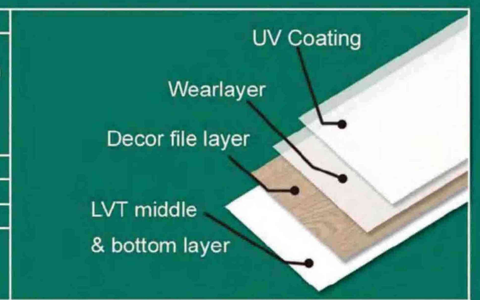

Characteristics	Test	LVT Glue Down
Dimensional Stability	ISO23999:2008	X Direction:0.12% Y Direction:0.10%
Flexibility	ISO 24344:2008 Method A	There was no cracking shown in both directions when tested with a 20 mandreal
Residual Indentation	ISO24343-1:2007	~0.04mm

LVT Click

Connect	Size
Standard Sizes	Plank: 150mm x 1220mm 180mm x 1220mm 220mm x 1220mm 305mm x 1220mm Tile: 305mm x 610mm 457mm x 610mm
Standard Thickness	4.0mm -7mm
Wear Layer	0.3mm 0.5mm 0.7mm（+13%/ -10% ）
Dimensional Stability	1.9~2.0g/cm³
Warranty	15 years warranty for private residential building 10 years warranty for commercial building

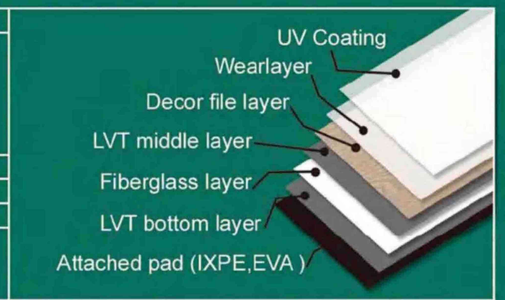

Characteristics	Test	LVT Click
Dimensional Stability	ISO23999:2008	X Direction:0.07% Y Direction:0.06%
Residual Indentation	ISO24343-1:2007	~0.04mm

LVT Self Adhesive

Connect	Size
Standard Sizes	Plank: 152.4mm x 914.4mm 152.4mm x 1219.2mm 177.8mm x 1219.2mm 228.6mm x 1219.2mm
Standard Thickness	1.2mm 1.5mm 1.8mm 2.0mm 3.0mm
Wear Layer	0.1mm 0.2 mm 0.3mm 0.5mm
Warranty	15 years warranty for private residential building 10 years warranty for commercial building

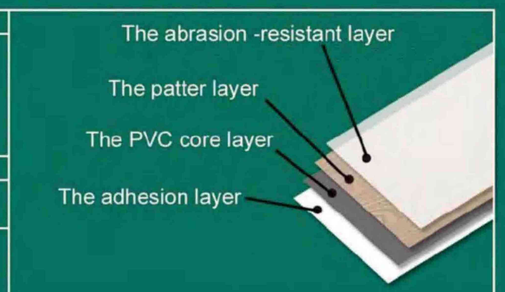

LVT Loose Lay

Connect	Size
Standard Sizes	Plank: 184.15mm x 1219.2mm 228.6mm x 1219.2mm 228.6mm x 1524mm Tile: 457.2mm x 457.2mm 457.2mm x 609.6mm 304.8mm x 609.6mm 914.4mm x 914.4mm
Standard Thickness	4.0mm -6.0mm
Wear Layer	0.3mm 0.55mm 0.7mm（+13%/ -10% ）
Density	1.9~2.0g/cm³
	15 years warranty for private residential
Warranty	building 10 years warranty for commercial building

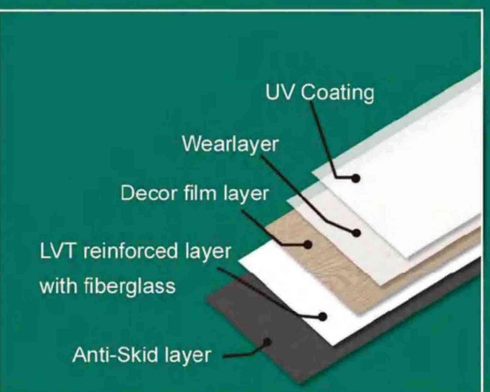

Characteristics	Test	LVT Loose Lay
Dimensional Stability	ISO23999:2008	X Direction:0.08% Y Direction:0.07%
Flexibility	ISO 24344:2008 Method A	There was no cracking shown in both directions when tested with a 20 mandreal
Residual Indentation	ISO24343-1:2007	~0.08mm

Characteristics	Test	GERNERALL USED -LVT
Curling	ISO23999 :2008	≤10.2mm
Light Stability	ISO105-B02:Method 3	≥6
Castor Chair	EN425	Typ W
Classification	EN ISO 10582	23, 31/33, 42
Reaction to fire	EN13501-1	Bfl S1(B1)
Slip Resistance	DIN 51130 EN 13893	R10 DS
Wear Resistance	EN660-2	Group T
Determination of resistance to stains chemical resistance	ISO026987:2008	Resistant
Chemical Resistance	EN438	Grade 5
Squareness	ISO24342:2007	Deviation range: X Direction: 0.00mm~+0.05mm Y Direction:0.00mm~+0.05mm""
Straightness	ISO24342:2007	Deviation range: X Direction: 0.00mm~+0.03mm Y Direction:0.00mm~+0.05mm""
Peel Resistance	ISO24345:2006	X Direction: 75N/50mm Y Direction: 75N/50mm""
Burning cigarette test	EN1399:1997 Method B	Rating 3: Moderate change of gloss and moderate brown stain
Utilization		Recyclable

Item size		Specification		Packing	
mm	in	Thickness	Wear Layer	Pcs/CTN	Sqm/CTN
152.4 x 914.4	6 x 36	2mm	0.2mm	33	4.59

CTN Size		One Container Loading		
mm	in	CTNS/Pallets	Sqm/Container	Sqm/Container
920x160x65	36.2x6.3x2.56	80	7344	20

LVT Click Avaliable size

LVT Loose lay Avaliable size

LVT DRY BACK Avaliable size

LVT Self adhesive Avaliable size

LVT DRY BACK Plank : 159mm x 1229mm, 152.4 x 914.4mm
184.15mm x1219.2mm, 228.6 x1219.2mm
228.6mm x 1524mm

Tile: 457.2mm x 457.2mm, 457.2mm x 609.6mm
304.8mm x 609.6mm,914.4mm x 914.4mm

Thickness: 2.0mm ~ 3.0mm

Wearlayer: 0.3mm, 0.5mm, 0.7mm

LVT Click Plank : 150mm x 1220mm,180mm x 1220mm
220mm x 1220mm 305mm x 1220mm

Tile: 305mm x 610mm 457mm x 610mm

Thickness: 4.0mm~6.0mm

Wearlayer: 0.3mm, 0.5mm, 0.7mm

LVT Loose Lay Plank : 184.15mm x 1219.2mm,
228.6mm x 1219.2mm, 228.6 x 1524mm

Tile: 457.2mm x 457.2mm, 457.2mm x 609.6mm
304.8mm x 609.6mm, 914.4mm x 914.4mm

Thickness: 4.0mm~6.0mm

Wearlayer: 0.3mm, 0.5mm, 0.7mm

LVT Self adhesive Plank :

152.4mm x 914.4mm, 152.4mm x 1219.2mm, 177.8mm x 1219.2mm
228.6mm x 1219.2mm

Thickness: 1.2mm，1.5mm，1.8mm，2.0mm，3.0mm

Wearlayer: 0.1mm 0.2mm 0.3mm 0.5mm

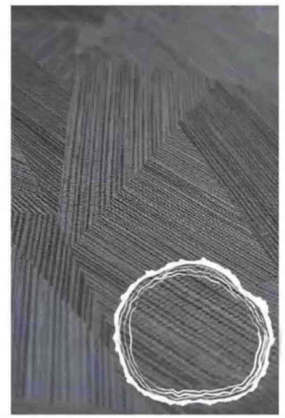

Tips: If needed ,we also can do customized size

Production

READY PRODUCTS

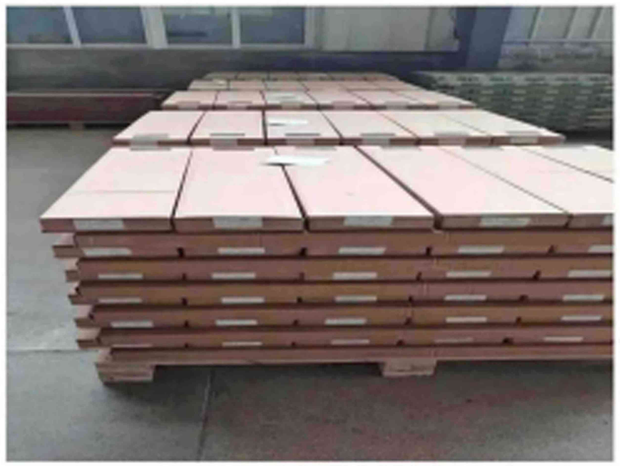

WAREHOUSE PRODUCTS

AUTOMATIC PACKAGING PRODUCTS

READY PACKAGES

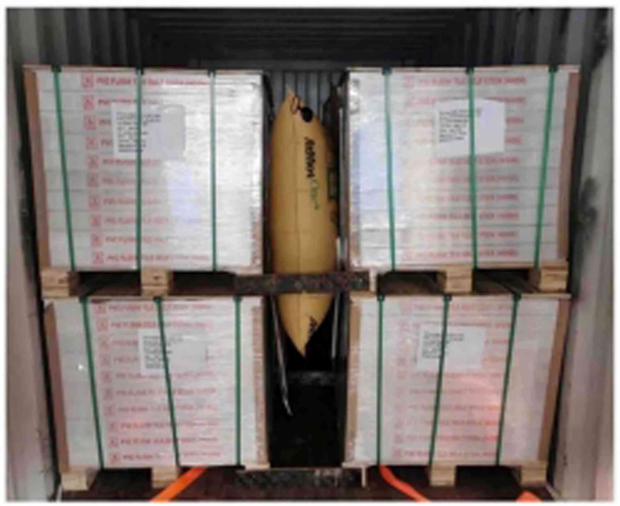

PACKAGE AND DELIVERY

CABINET PACKAGE

Beijing Wanrun High – tech New Materials Co., Ltd.

No. 55 Gaobeidian 1 Chaoyang District Beijing China

+86 13622239224

No. 55 Gaobeidian 1 Tongzhou District Beijing China